




B & R Automation - 8EI Servo Drive Series

8EI8X8HWT10.0100-1

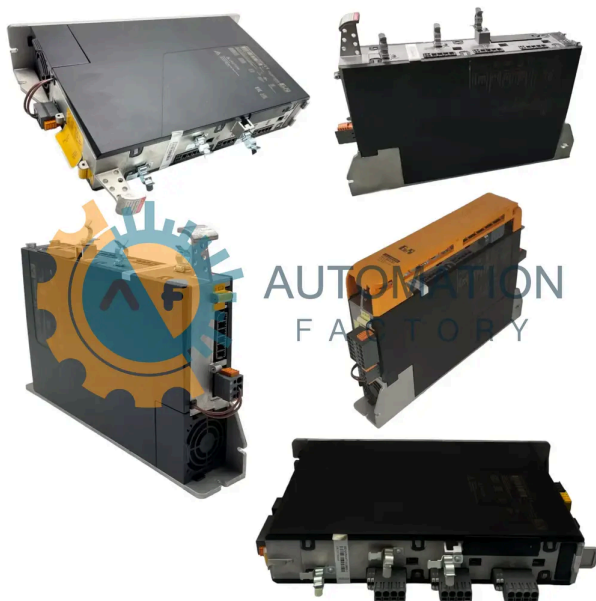

Request a Quote

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **8EI8X8HWT10.0100-1** is a part of the **8EI Servo Drive Series** by **B & R Automation**.

Specifications

Wall Mounting:	258.5 mm (with 8EXA front cover: 261 mm)	Weight:	4 kg	Dynamic Node Allocation:	Yes
Slots For Plug-in Modules:	1	Network Configurations:	TN-S, TN-C-S with grounded neutral	Mains Input Voltage:	3x 200 VAC to 480 VAC ~10%
Frequency:	50 / 60 Hz ~4%	Installed Load:	Max. 10 kVA	Inrush Current:	Max. 45 A
Switch-on Interval:	Typ. 60 s	Integrated Line Filter:	No	Flexible And Fine-stranded Wires:	0.25 to 4 mm ² (with wire end sleeves)
Approbation Data:	UL/C-UL-US, CSA	Power Dissipation:	$[60 + 6.9 * P_AVG [kW] + 7.5 * (I_AX1 [A] + I_AX2 [A] + I_AX3 [A]) + 0.25 * (I_BR1^2 [A] + I_BR2^2 [A] + I_BR3^2 [A]) + P_VSLOT] * 1.1 [W]$	Max. Line Length:	3 m
Contact Us	11/21/2024 4:46 PM				

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods

