


B & R Automation - 8LS Synchronous Motors

8LSA35.E2030D100-0

 **Call For Quote**

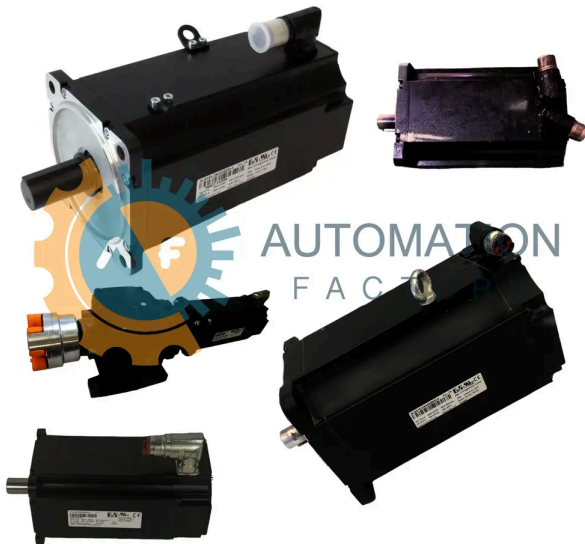

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **8LSA35.E2030D100-0** is a part of the **8LS Synchronous Motors Series** by **B & R Automation**.

Specifications

Configuration Summary:	8LSA: Standard, no reinforced bearing	Connection direction:	Angled (swivel)	Connection Hardware:	Connector
Continuous Current:	12 A	Continuous Torque:	15.6 Nm	Cooling Principle:	Self-cooling, free circulation
Cooling Type:	Natural convection	Designation:	8LSA	Encoder Type:	Resolver
Flange Dimension:	91.3 (mm)	Frame Size:	35	Holding Brake:	Not Present
Length Code:	5	Motor Type:	Three-phase synchronous	Mounting Availability:	Mounting flange
Nominal Speed:	3000 rpm	Nominal Voltage:	317 V	Oil Seal:	Not Present
Peak Torque:	47 Nm	Protection Type:	IP65	Rated Speed:	3000 (rpm)
Shaft End:	With key	Stator Length:	E	Weight:	15 kg
Last Verified:	05/19/2026 11:43 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@wakeindustrial.com

Shipping Options



Payment Methods

