


B & R Automation - ECP Multi Control Series

ECPE42-1

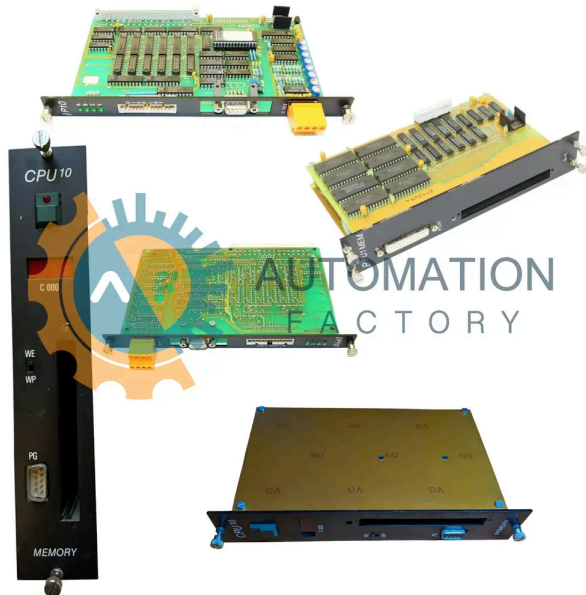

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **ECPE42-1** is a part of the **ECP Multi Control Series** by **B & R Automation**.

Specifications

Number Of Inputs:	4	Galvanic Isolation:	NO	Nominal Input Signal:	0 to 10 V / 0 to 20 mA
Minimum Maximum Input Signal:	-22 V / 70 mA	Resolution:	10 Bit	Conversion Time Per Channel:	100 usec per Channel
Differential Input Resistance:	400 k degrees C"	Load:	50 degrees C"	Voltage Drop At 20 Ma:	1 V
Input Filter Cutoff Frequency:	640 Hz, 6 dB/Decade	Basic Precision At 20 degrees c:	-0.3%	Offset Drift:	-0.0025 % / degrees C
Gain Drift:	-0.025 % / degrees C	Linearity:	0.2 % / V	Power Consumption At +8v:	0.7 W
Last Verified:	12/02/2024 5:15 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

