




B & R Automation - System 2003 Controllers

3IF762.9

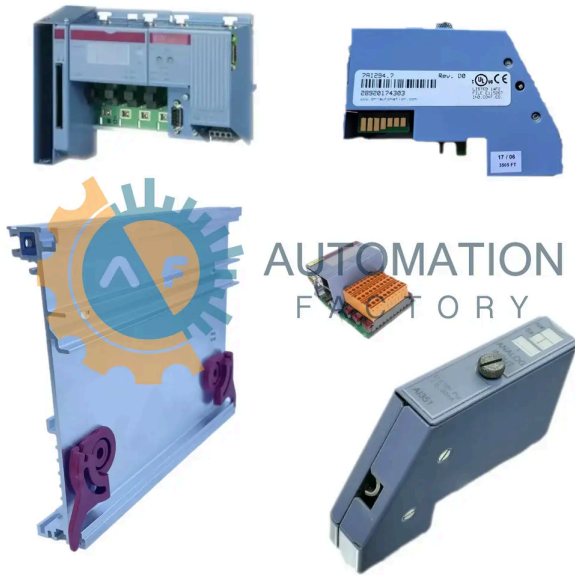

In Stock, Shipping Varies

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **3IF762.9** is a part of the **System 2003 Controllers Series** by **B & R Automation**.

Specifications

Bus Termination:	External T-connector (e.g., 0G1000.00-090)	Module Type:	PCI module with PROFIBUS DP and RS485/422	Operating Temperature:	0°C to 60°C
Power Consumption (Profibus DP):	1.29 W @ 5 V	Power Consumption (RS485/422):	0.15 W @ 3.3 V	Profibus DP Connector:	9-pin D-sub socket
Profibus DP Node Addressing:	Via two hex switches	Profibus DP Transfer Rate:	12 Mbit/s	Protection Rating:	IP20
RS485/422 Connector:	9-pin D-sub socket	RS485/422 Controller:	UART 16C550, 16-byte FIFO	RS485/422 Max Cable Length:	1200 m
RS485/422 Transfer Rate:	115.2 kbit/s	Storage Temperature:	-25°C to 70°C	Total Power Consumption:	1.44 W
Last Verified:	08/13/2025 8:07 AM				

Contact Us

📍 1620 Old Apex Road, Cary, NC 27513, USA

📞 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

🌐 International: [1-919-443-0207](tel:1-919-443-0207)

📠 Fax: [1-919-867-6204](tel:1-919-867-6204)

✉ Email: sales@automation-factory.com

Shipping Options



Payment Methods

