


B & R Automation - X20 Fieldbus Input Output Modules

X20PD0012

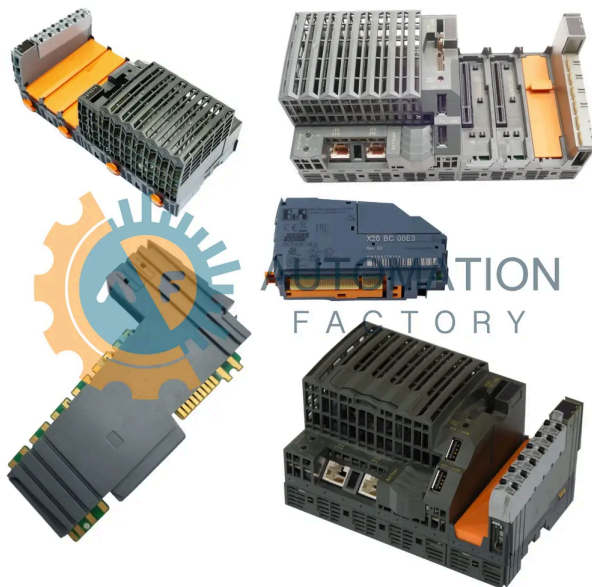

 **In Stock, Ships Today**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20PD0012** is a part of the **X20 Fieldbus Input Output Modules Series** by **B & R Automation**.

Specifications

Ambient temperature range:	0 to 60°C	Bus power consumption:	0.12 W	Fuse monitoring:	Via status LED and software
Fuse specification:	6.3 A slow-blow microfuse, exchangeable	Ingress protection rating:	IP20	Internal I/O power consumption:	1 W
Mechanical spacing with X20TB12 terminal block:	12.5 ±0.2 mm	Minimum cycle time:	100 ?s	Minimum I/O update time:	100 ?s
Mounting orientation:	Horizontal or vertical	Operating temp (horizontal):	-25 to 60°C	Operating temp (vertical):	-25 to 50°C
Output rated voltage:	24 VDC	Permitted contact load:	10 A	Storage/transport temp range:	-40 to 85°C
Last Verified:	08/01/2025 9:51 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.