


B & R Automation - X20 Fieldbus Input Output Series

X20DI9372

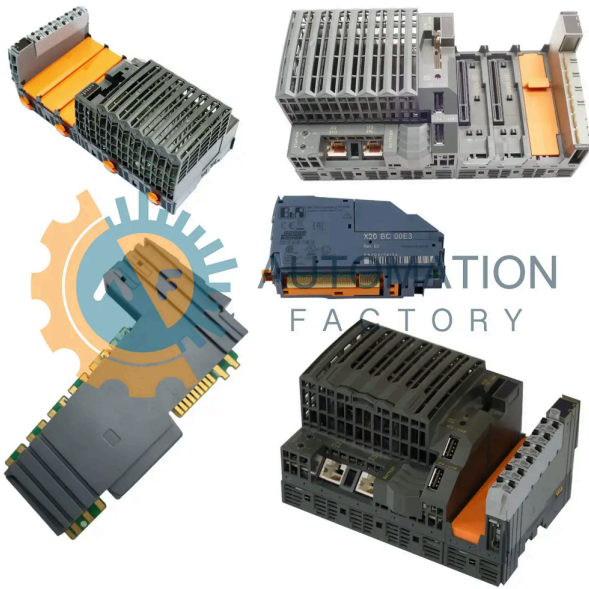

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping








One Year
Warranty

The **X20DI9372** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Nominal Voltage:	24 VDC	Input Voltage:	24 VDC -15% / +20%	Input Current At 24 Vdc:	Typ. 3.75 mA
Input Characteristics:	per EN 61131-2 Type 1	Input Filter:	Hardware <=100 us, Software Default 1 ms, configurable between 0 and 25 ms in 0.2 ms intervals	Connection Type:	1-wire connections
Input Circuit:	Source	Input Resistance:	Typ. 6.4 kohm	Switching Threshold (low):	<5 VDC
Switching Threshold (high):	>15 VDC	Isolation Voltage Between Channel And Bus:	500 V	Operating Temperature (horizontal Mounting):	-25 to 60 degrees C
Operating Temperature (vertical Mounting):	-25 to 50 degrees C	Storage Temperature:	-40 to 85 degrees C	Last Verified:	12/29/2024 5:10 PM

Contact Us

-  1620 Old Apex Road, Cary, NC 27513, USA
-  Toll Free: [1-888-551-3082](tel:1-888-551-3082)
-  International: [1-919-443-0207](tel:1-919-443-0207)
-  Fax: [1-919-867-6204](tel:1-919-867-6204)
-  Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.