


B & R Automation - X20 Fieldbus Input Output Modules

X20DO4332

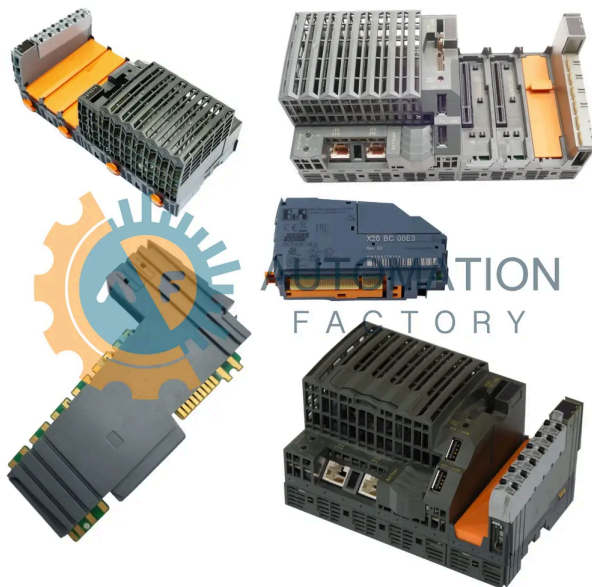

 **Request a Quote**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20DO4332** is a part of the **X20 Fieldbus Input Output Modules Series** by **B & R Automation**.

Specifications

4 digital outputs with 2 A, Source connection, 3-wire connections, 24 VDC and GND for actuator supply, Integrated output protection, OSP mode

I/O function per channel, operating state, module status

Module run/error (using status LED and software), Outputs (using status LED and software)

General:
Bus Power Consumption:

0.16 W

Status Indicators:
Internal I/o Power Consumption:

0.49 W

Diagnostics:
Additional Power Dissipation:
Nominal Output Current:

+1.6 (Rev.

Nominal Voltage:
Total Nominal Current:

24 VDC

Switching Voltage:

24 VDC -15 % / +20 %

Output Circuit:

2 A

Output Protection:

Thermal cutoff (overcurrent/short circuit), Internal inverse diode
01/08/2025
9:51 PM

Connection Type:

3-wire connections

Peak Short Circuit Current:


Source

Leakage Current When Switched Off:

5 uA

<4 A (Rev.

Last Verified:
Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.