


B & R Automation - X20 Fieldbus Input Output Modules

X20DO4332

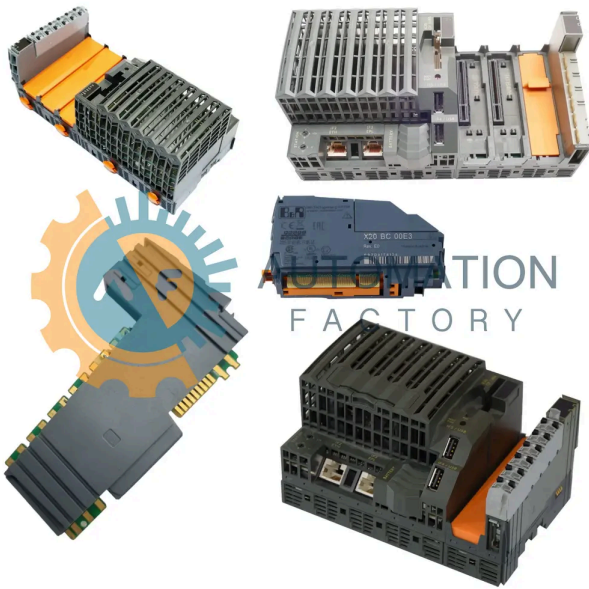

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20DO4332** is a part of the **X20 Fieldbus Input Output Modules Series** by **B & R Automation**.

Specifications

4 digital outputs with 2 A, Source connection, 3-wire connections, 24 VDC and GND for actuator supply, Integrated output protection, OSP mode

I/O function per channel, operating state, module status

Module run/error (using status LED and software), Outputs (using status LED and software)

General:
Bus Power Consumption:

0.16 W

Status Indicators:
Internal I/o Power Consumption:

0.49 W

Diagnostics:
Additional Power Dissipation:

+1.6 (Rev.

Nominal Voltage:
Total Nominal Current:

24 VDC

Switching Voltage:

24 VDC -15 % / +20 %

Nominal Output Current:

2 A

Output Protection:

Thermal cutoff (overcurrent/short circuit), Internal inverse diode
01/09/2025
10:11 AM

Connection Type:

3-wire connections

Output Circuit:

Source


Leakage Current When Switched Off:

5 uA

Peak Short Circuit Current:

<4 A (Rev.

**Last Verified:
Contact Us**

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

