


B & R Automation - X20 Fieldbus Input Output Series

X20HB2885

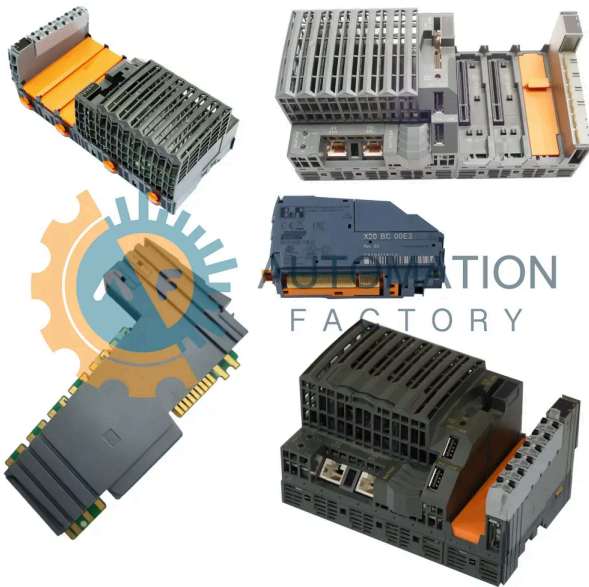

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20HB2885** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Status Indicators:	Module status, bus function	Diagnostics - Bus Function:	Yes, using status LED	Power Consumption:	1.17 W
Electrical Isolation - Fieldbus To Supply:	Yes	Interfaces - Type:	Active hub expansion module	Interfaces - Design:	2x shielded RJ45
Interfaces - Cable Length:	Max. 100 m between 2 stations (segment length)	Interfaces - Transfer Rate:	100 Mbit/s	Interfaces - Transmission - Physical Layer:	100BASE-TX
Operating Conditions - Mounting Orientation:	Horizontal and Vertical	Installation At Elevations Above Sea Level - 0 To 2000 M:	No limitations	Installation At Elevations Above Sea Level - >2000 M:	Reduction of ambient temperature by 0.5 degrees C per 100 m
En 60529 Protection:	IP20	Temperature - Storage And Transport:	-40 to 85 degrees C	Relative Humidity - Storage And Transport:	5 to 95%, non-condensing
Last Verified:	12/30/2024 8:52 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

