


B & R Automation - X20 Fieldbus Input Output Series

X20PS9500

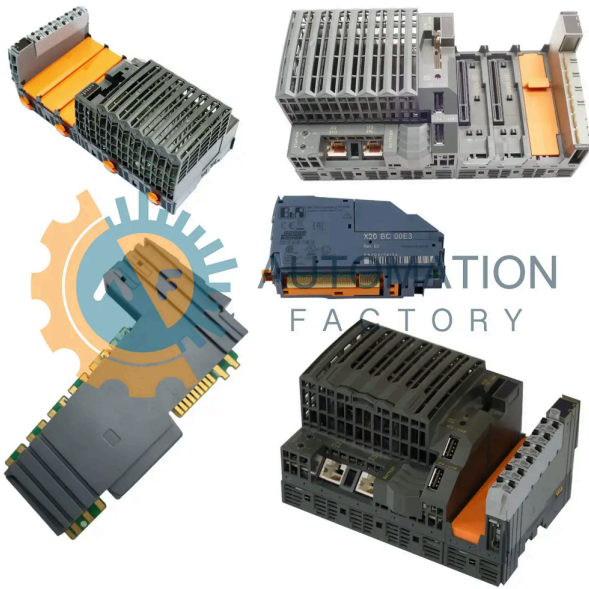

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20PS9500** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Input Voltage:	24 VDC -15% / +20%	Input Current:	Max. 0.7 A	Reverse Polarity Protection:	Yes
Nominal Output Power:	7 W	Parallel Connection:	Yes	Redundant Operation:	Yes
Overload Characteristics:	Short circuit protection, temporary overload	Input I/o Power Supply Fuse:	Required line fuse: Max. 10 A, slow-blow	Nominal Output Voltage:	24 VDC
Output I/o Power Supply Short Circuit Behavior:	Required line fuse	Interfaces:	RS232, CAN bus	Temperature Range (horizontal Mounting):	-25 to 60 degrees C
Temperature Range (vertical Mounting):	-25 to 50 degrees C	Storage Temperature:	-40 to 85 degrees C	Degree Of Protection:	IP20
Last Verified:	12/30/2024 3:55 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.