


B & R Automation - X20 Fieldbus Input Output Modules

X20PS9600

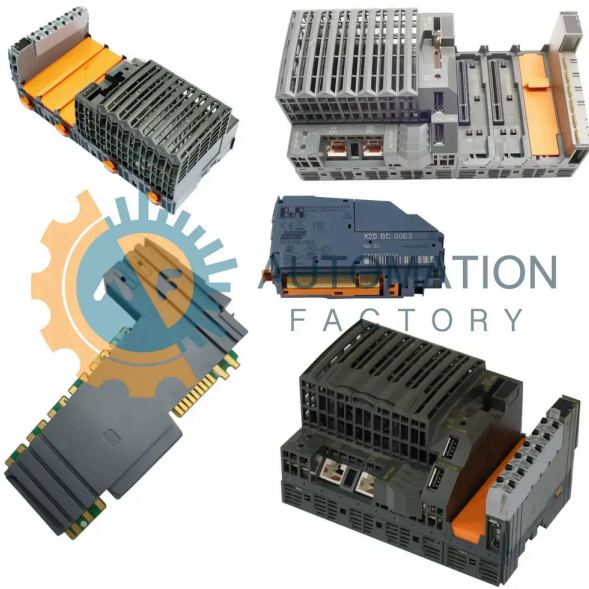

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20PS9600** is a part of the **X20 Fieldbus Input Output Modules Series** by **B & R Automation**.

Specifications

Power Supply Module:	24 VDC power supply module for Compact-S CPU, X2X Link power supply, and I/O	Interfaces:	1x RS232, 1x CAN bus	Status Indicators:	Overload, operating state, module status, RS232, CAN bus
Power Consumption Of X2x Link Power Supply:	1.42 W	Power Consumption, Internal I/O:	0.6 W	Input Voltage, Cpu/x2x Link Power Supply:	24 VDC -15% / +20%
Input Current, Cpu/x2x Link Power Supply:	Max. 0.7 A	Nominal Output Power, Cpu/x2x Link Power Supply:	7 W	Input Voltage, I/O Power Supply:	24 VDC -15% / +20%
Nominal Output Voltage, I/O Power Supply:	24 VDC	Interfaces Transfer Rate:	RS232: Max. 115.2 kbit/s, CAN bus: Max. 1 Mbit/s	Operating Temperature:	Horizontal mounting orientation: -25 to 60 degrees C, Vertical mounting orientation: -25 to 50 degrees C
Storage Temperature:	-40 to 85 degrees C	Number Of Connection Cycles:	50	Last Verified:	01/10/2025 2:40 AM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.