


B & R Automation - X20 Fieldbus Input Output Modules

X20PS9600

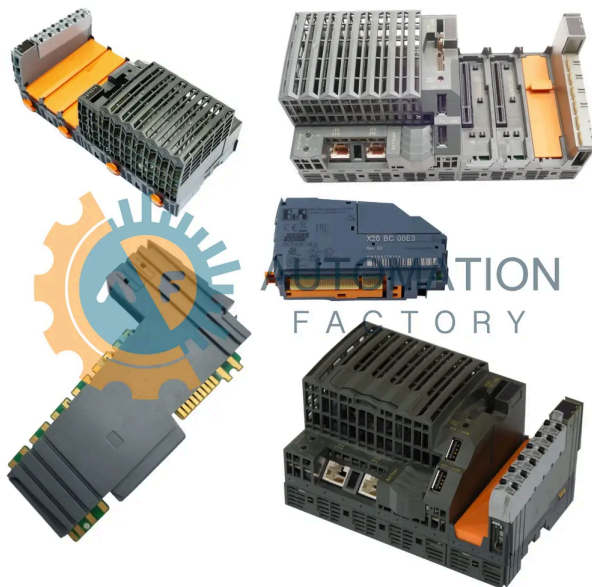

 [Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20PS9600** is a part of the **X20 Fieldbus Input Output Modules Series** by **B & R Automation**.

Specifications

Power Supply Module:	24 VDC power supply module for Compact-S CPU, X2X Link power supply, and I/O	Interfaces:	1x RS232, 1x CAN bus	Status Indicators:	Overload, operating state, module status, RS232, CAN bus
Power Consumption Of X2x Link Power Supply:	1.42 W	Power Consumption, Internal I/o:	0.6 W	Input Voltage, Cpu/x2x Link Power Supply:	24 VDC -15% / +20%
Input Current, Cpu/x2x Link Power Supply:	Max. 0.7 A	Nominal Output Power, Cpu/x2x Link Power Supply:	7 W	Input Voltage, I/o Power Supply:	24 VDC -15% / +20%
Nominal Output Voltage, I/o Power Supply:	24 VDC	Interfaces Transfer Rate:	RS232: Max. 115.2 kbit/s, CAN bus: Max. 1 Mbit/s	Operating Temperature:	Horizontal mounting orientation: -25 to 60 degrees C, Vertical mounting orientation: -25 to 50 degrees C
Storage Temperature:	-40 to 85 degrees C	Number Of Connection Cycles:	50	Last Verified:	01/09/2025 2:23 AM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

