




B & R Automation - X20 Fieldbus Input Output Series

X20SL8010

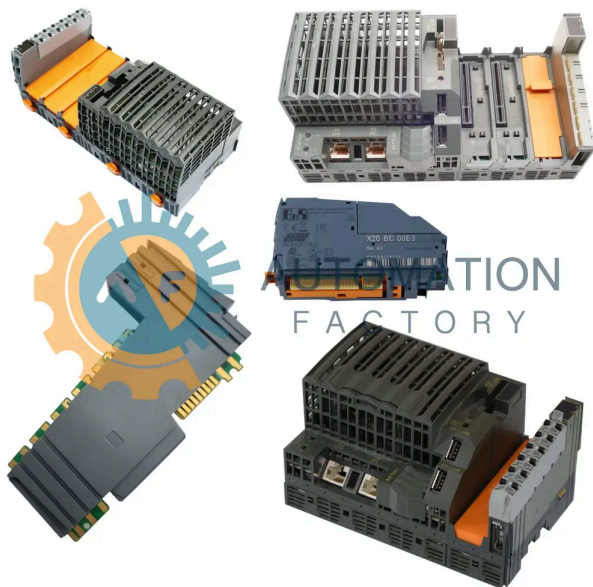

[Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20SL8010** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Type:	Safety PLC	Max Supported Safety Nodes:	20	Power Consumption:	5.1 W
Processor:	Intel XSCALE 266 MHz	Status Indicators:	['CPU function', 'POWERLINK', 'SafeKEY']	Fieldbus Type:	POWERLINK V2
Max Cable Length:	100 m	Rated Voltage:	+24 VDC (-15% / +20%)	Transfer Rate:	100 Mbit/s
Installation Altitude:	0 to 2000 m (without derating), above 2000 m (reduce ambient temperature by 0.5 degrees C per 100 m)	Operating Temperature:	['Horizontal installation: 0 to 55 degrees C', 'Vertical installation: 0 to 45 degrees C']	Storage Temperature:	-25 to 70 degrees C
Dimensions:	87.5 mm (W) x 99 mm (H) x 75 mm (D)	Protection Type:	IP20	Last Verified:	01/02/2025 2:33 AM

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.