


B & R Automation - X20 Fieldbus Input Output Series

X20SL8010

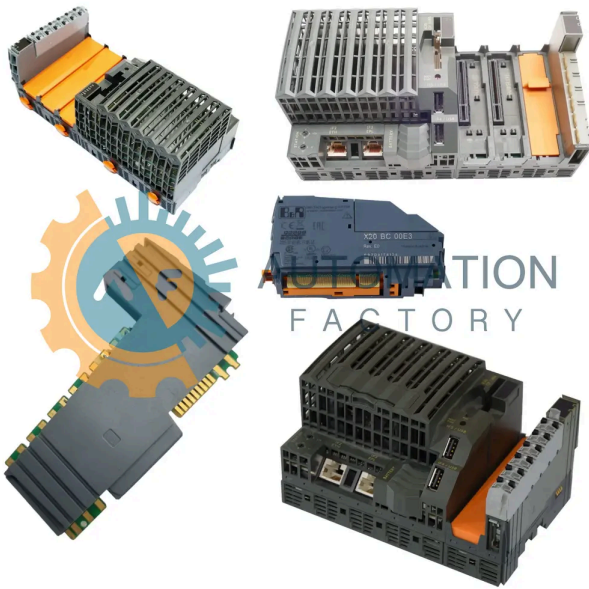

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20SL8010** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Type:	Safety PLC	Max Supported Safety Nodes:	20	Power Consumption:	5.1 W
Processor:	Intel XSCALE 266 MHz	Status Indicators:	['CPU function', 'POWERLINK', 'SafeKEY']	Fieldbus Type:	POWERLINK V2
Max Cable Length:	100 m	Rated Voltage:	+24 VDC (-15% / +20%)	Transfer Rate:	100 Mbit/s
Installation Altitude:	0 to 2000 m (without derating), above 2000 m (reduce ambient temperature by 0.5 degrees C per 100 m)	Operating Temperature:	['Horizontal installation: 0 to 55 degrees C', 'Vertical installation: 0 to 45 degrees C']	Storage Temperature:	-25 to 70 degrees C
Dimensions:	87.5 mm (W) x 99 mm (H) x 75 mm (D)	Protection Type:	IP20	Last Verified:	12/29/2024 11:17 PM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

