


Kollmorgen - SR and SRF Permanent Magnet Motors

Srf5348-4485-84-1-45Bc

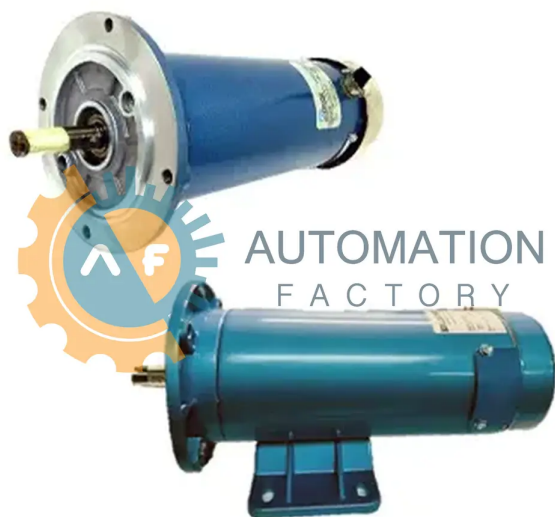

 **Request a Quote**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **Srf5348-4485-84-1-45Bc** is a part of the **SR and SRF Permanent Magnet Motors Series** by **Kollmorgen**.

Specifications

Conduit Connection L:	1/2 NPSC TAP with .56 I.D. removable insulating bushing	Conduit Connection M:	PG 13.5 TAP without insulating bushing	Encoder Mounting:	Encoder mounting option available
Encoder Output Frequency:	100 kHz	Equally Spaced Mounting Diameter:	3.000 in [76.2 mm] B.C.	Max Diameter:	0.59 in [15.0 mm]
Maximum Torque:	1380 oz-in (9.74 Nm)	Mounted Thermal Resistance:	10.9 °C/Watt	Mounting Bolt Configuration:	3X #10-32 UNC-2B
Phase Resistance:	0.16 Ohms (± 10%)	Shaft Diameter:	0.1875 in [4.763 ± 0.051 mm]	Splashproof Construction:	Available
Standard Nema Frame:	NEMA 42 FRAME	Terminal Board Connections:	Available in L or M constructions	Typical Inductance:	3.1 mH
Last Verified:	06/06/2025 1:09 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.