


Okuma - BL Servo Drives

BL-D 15D

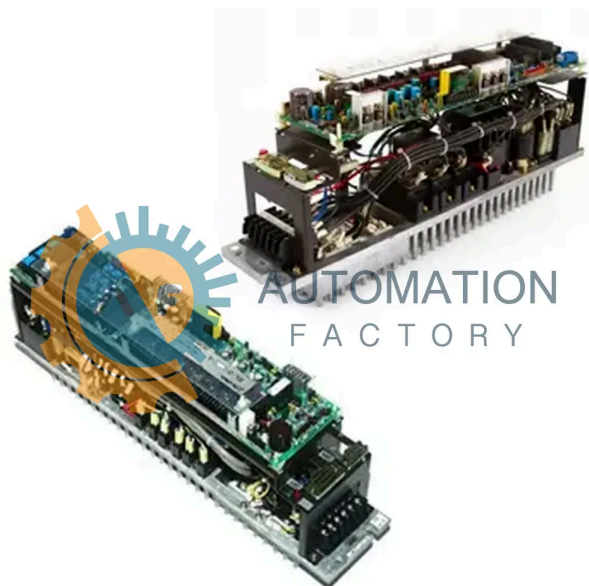

 [Request a Quote](#)

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **BL-D 15D** is a part of the **BL Servo Drives Series** by **Okuma**.

Specifications

Connector wiring diagrams:	Pin layouts for connectors XB1, XB2, XB3	Dynamic brake function:	Ext resistor required if load inertia >5× motor	Height:	780 mm
Input voltage (control):	85-125 VAC, single-phase	Input voltage (main):	180-240 VAC, three-phase, 50/60 Hz	Internal width:	123 mm
LED indicators:	PON (green), OP (yellow), red alarm LEDs	Max humidity:	75% RH (operating), 95% RH short-term	Mounting:	M6×4 holes; 4 mm clearance between units
Operating frequency:	50/60 Hz	Operating temperature:	0 to 55 °C	Product series:	BL II-D servo amplifier
Rated motor output:	0.8 kW	Storage temperature:	-20 to 60 °C	Width:	466-482 mm
Last Verified:	06/02/2025 3:22 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.