




Okuma - BL Servo Drives

BLIII-D150D

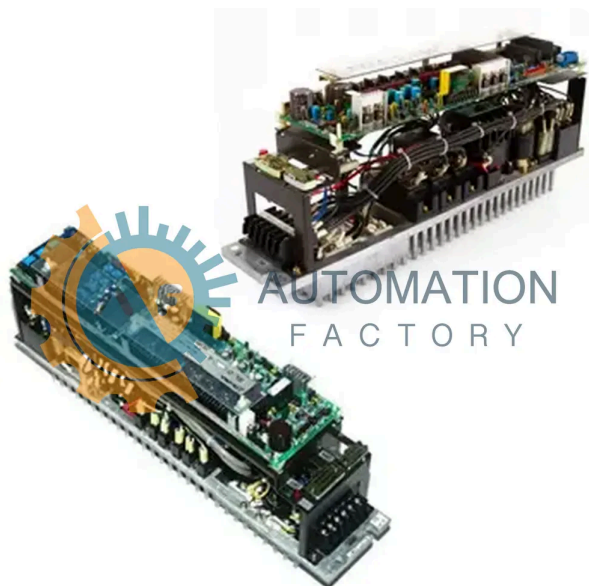

[Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **BLIII-D150D** is a part of the **BL Servo Drives Series** by **Okuma**.

Specifications

CN1 Connector:	MRDY, MRDY-COM	Communication Protocols:	EtherCAT, CANopen, Okuma proprietary	Control Interface:	Okuma CNC control systems
Cooling Method:	Forced-air & integrated heatsink	Efficiency:	High efficiency	Input Terminals:	R, S, T
Input Voltage (Single-phase):	AC 180-242 V, 50/60 Hz	Input Voltage (Three-phase):	AC 380-460 V, 50/60 Hz	Modulation Method:	Pulse Width Modulation (PWM)
Mounting Standard:	Okuma CNC installation	Protection Functions:	Overcurrent, overvoltage & thermal shutdown	Protective Earth Terminal:	E
Last Verified:	06/05/2025 12:22 PM				

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.