




Okuma - BL Servo Drives

E5402-183-009

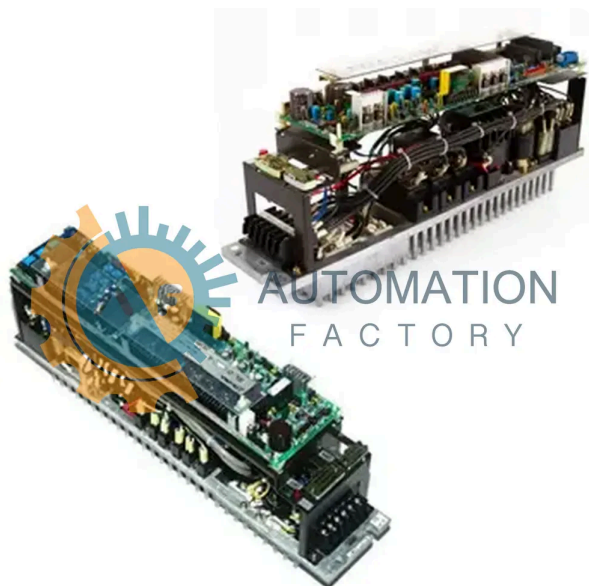

[Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **E5402-183-009** is a part of the **BL Servo Drives Series** by **Okuma**.

Specifications

Capacity range:	15 ^{SPR} 150 (model dependent)	Control circuit voltage:	Single-phase 85 ^{SPR} 125 VAC	Current command input connector:	MRP-20F01
Dimensional drawings:	Refer to manual Section 5	Dynamic brake function:	Built-in brake; supports external resistor	Frequency:	50/60 Hz
Main input voltage:	3-phase 180 ^{SPR} 240 VAC 50/60 Hz	Motor output power:	0.8 ^{SPR} 8.0 kW	Operating humidity:	75% RH (95% short periods) LEDs: PON, OP*, OCM*, PCS*, OV, UV
Operating temperature:	0°C to 55°C	Processor board:	SVP II?D	Status indicators:	
Storage temperature:	20 ^{SPR} 60°C	Thermal brake signal connector:	Dynamic series 178288-5	Vibration resistance:	Max 0.5 G
Wiring requirements:	AC1/AC2 wire ?0.5 mm ² ; terminal M4	Last Verified:	06/01/2025 3:17 PM		

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.