


Okuma - E0451 Power Supply Boards

E0451-521-016A

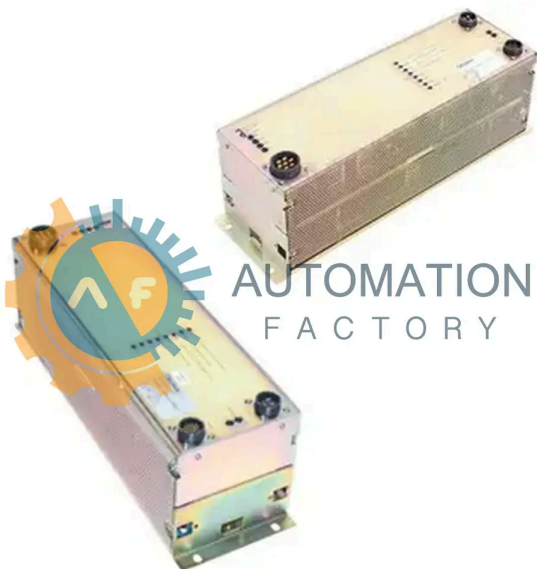

 [Request a Quote](#)

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **E0451-521-016A** is a part of the **E0451 Power Supply Boards Series** by **Okuma**.

Specifications

Coil Resistance: 1200 \pm 10%

Contact Rating: 10A at 250V AC

Drop-out Voltage: 2.4V DC min.

Operating Temperature: -40°C to +85°C

Type: Electromagnetic Contact Relay

Coil Voltage: 24V DC

Dielectric Strength: 1500V AC for 1 minute between coil and contacts
Insulation Resistance: 100 M Ω min. (at 500V DC)

Pick-up Voltage: 16.8V DC max.

Weight: 38g

Contact Configuration: 2 Form A (DPST-NO)

Dimensions: 36mm x 28mm x 20mm

Mounting: PCB

Release Time: 8 ms max.

Last Verified: 08/15/2025 12:49 PM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.