


Okuma - E4809 CNC Boards

E4809-04U-003-A

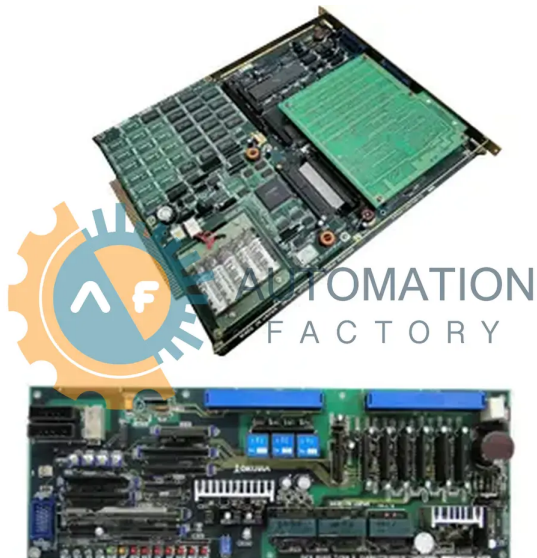

 **In Stock, Ships in 3-5 Days**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **E4809-04U-003-A** is a part of the **E4809 CNC Boards Series** by **Okuma**.

Specifications

Cable Diameter:	4.7 mm	Cable Material:	PUR (Polyurethane)	Component Labels:	IC, Q, D, R, C, JP
Connector Type A:	M12, Male, 4-Pin	Connector Type B:	M12, Female, 4-Pin	Diagnostic Points:	Test points included for monitoring
Ip Protection Class:	IP67	Length:	3 meters	Operating Voltage:	Max 60 V AC/DC
PCB Layout:	Mixed-signal with dense SMT configuration	Rated Current:	4 A	Rohs Compliance:	Yes
Shielding:	Shielded	Temperature Range:	-25°C to +80°C	Type:	Sensor Cable
Last Verified:	08/16/2025 2:22 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

