




Okuma - MIV Servo Drives

MIV04A-E

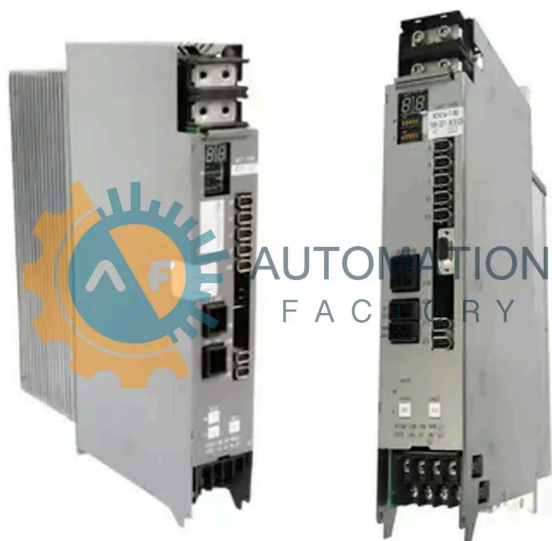

In Stock, Shipping Varies

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **MIV04A-E** is a part of the **MIV Servo Drives Series** by **Okuma**.

Specifications

Applicable Motor Capacity: 4 kW (5.3 hp)

Control Type: 2-axis control for BL motors
Drives spindle motors and axis drive motors

Inverter Functionality:

Motor Speed Unit: 1562 min-1/V

Port Dimensions (h x W x D): 380 x 100 x 325 mm (14.96 x 3.94 x 12.79 in)

Last Verified: 05/06/2025 6:55 PM

Communication Interface:

Cooling Specification:

Monitor Terminal Output Multiplication: 1/42 for voltage error signals

Motor Torque Output Voltage Range: -3 V to +3 V

Resolver Signal Voltage:

Servo link, encoder link, and converter link
External fan cooling provided

Control Board Compatibility:

External Voltage Compatibility:

Motor Speed Output Voltage Range: -3 V to +3 V

Motor Torque Peak Value: Motor peak torque at 3 V

Weight:

Compatible with ICB1H-S control boards
300 VDC and 24 VDC

7.8 kg (17.2 lb)

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods

