


Bosch Rexroth Indramat - SM AC Inverters

SM 18/60-GC

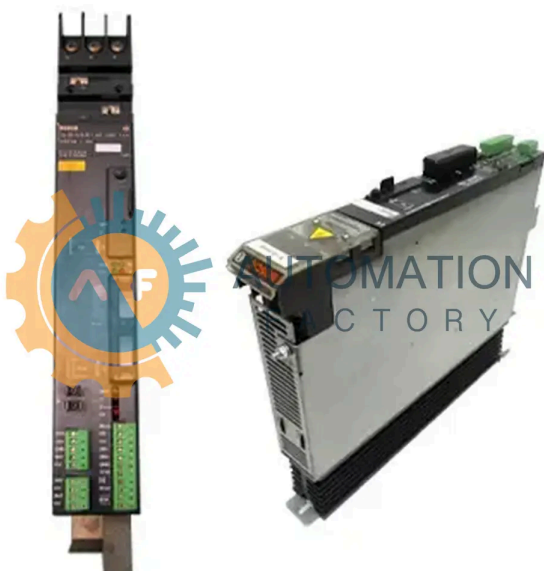

 [Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **SM 18/60-GC** is a part of the **SM AC Inverters Series** by **Bosch Rexroth Indramat**.

Specifications

Damping Factor (p613):	Torque filter Zeta	Filter Band Width For Torque Signal (p612):	Torque filter frequency	Home Position Offset (p614):	Position back-signal [Gain Factor] - Permissible values 0 to 100000
Maximum Lag Error (p611):	Following error relative to motor speed	Maximum Static Position Error (p610):	Static loop error	Proportional Gain Of Position Controller (p606):	Industrial Equipment
Torque Limit Values (p607):	Auto. current limit value for automatic mode	Shelf:	D5	Product Type:	05/10/2025 4:44 AM
Stock Level:	Request a Quote	Packaging:	Military Grade Foam	Last Verified:	

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.