




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT 17173-52

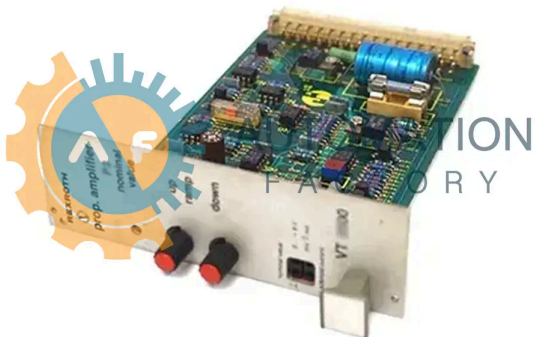

 **Request a Quote**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 17173-52** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Biassing current:	10 to 300 mA, adjustable via potentiometer	Card dimensions:	100 x 160 mm (Euro-card DIN 41494)	Clock frequency:	100/200 Hz $\pm 10\%$
Connector:	32-pin male, DIN 41612 Form D	Current consumption:	<1 A	Front panel height:	128.4 mm (3 HE)
Front panel width (component side):	15.24 mm (3 TE)	Front panel width (soldering side):	5.08 mm (1 TE)	Fuse rating:	2.5 A time-delay
Input 1 range:	0 to 9 V (ref. M0)	Input 2 diff range:	0 to 10 V, 100 k?	Operating voltage:	24 VDC $+40\%/-5\%$ (22-35 V)
Output current signal:	0 to 800 mV (0-800 mA ± 10 mA)	Output w voltage:	0 to 6 V (1 k?)	Power consumption:	<25 VA
Ramp time adjustment:	30 ms to 1 s or 5 s (jumper)	Regulated output:	± 9 V $\pm 1\%$, 25 mA load	Solenoid current:	800 mA $+10\%/-5\%$
Solenoid resistance at 20°C:	19.5 ?	Last Verified:	07/03/2025 2:48 PM		

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.