




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT 19021-30/RA1

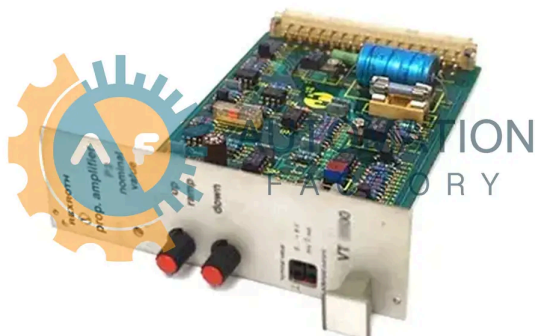

[Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 19021-30/RA1** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Biasing current:	10 mA $\pm$ 300 mA (via pot R130)	Card dimensions:	100×160 mm (Euro-card DIN 41494)	Connector:	32-pin male (DIN 41612 form D)
Current consumption:	<1 A	Front panel height:	3 HE (128.4 mm)	Front panel width:	3 TE + 1 TE (soldering)
Fuse rating:	2.5 A T (time?lag)	Input 1:	0 $\pm$ 9 V (ref. M0)	Input 2 (diff.):	0 $\pm$ 10 V, 100 k? 100/200 Hz ($\pm$ 10%), jumper S2
Operating temperature:	0 $\pm$ 50 °C	Operating voltage:	22 $\pm$ 35 VDC	Output clock:	$\pm$ 9 V ($\pm$ 1%, $\pm$ 25 mA)
Power consumption:	<25 VA	Ramp time:	30 ms $\pm$ 1 s or 5 s (jumper S1)	Regulated supply:	
Solenoid current:	0 $\pm$ 300 mA ($\pm$ 10 mA), socket I	Storage temperature:	25 to +85 °C	Weight:	0.1 kg
Last Verified:	07/03/2025 11:10 AM				

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods

