




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT-2000-51a

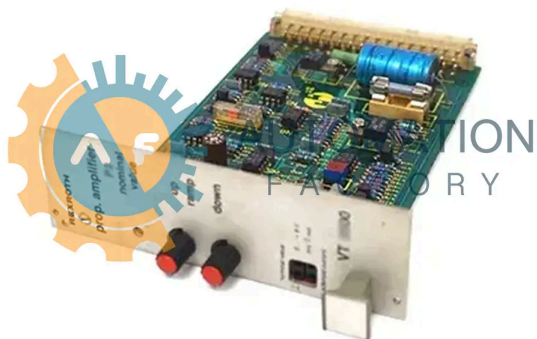

 **Request a Quote**

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-2000-51a** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

| | | | | | |
|--------------------------------|--|-----------------------------|--|-------------------------------|--------------------------------------|
| Card Dimensions: | 100 x 160 mm (Euro-card, DIN 41494) | Clock Frequency: | 100 or 200 Hz ±10% (jumper S2) | Command Input 1 Range: | 0 to +9 V (ref. measurement zero M0) |
| Command Input 2 Range: | 0 to +10 V differential, Rin = 100 k? | Connector Type: | 32-pin male (DIN 41612, form D) | Current Consumption: | < 1 A |
| Front Panel Height: | 128.4 mm (3 HE) | Front Panel Width: | 3 TE component side, 1 TE solder side | Fuse Rating: | 2.5 A slow-blow |
| Operating Temperature: | 0 to +50 °C | Operating Voltage: | 24 V DC +40%/-5% (22 to 35 V) | Power Consumption: | < 25 VA |
| Protections: | Overload and short-circuit protection | Ramp Time: | 30 ms (external contacts); ~1 s or 5 s (jumper S1) | Regulated Voltage: | ±9 V ±1% (? ±25 mA load) |
| Solenoid Current Range: | 0 to 800 mA ±10 mA (R20 = 19.5 ?) | Storage Temperature: | -25 to +85 °C | Weight: | 0.1 kg |
| Last Verified: | 07/02/2025 10:57 AM | | | | |

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

