




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT-2000-A52

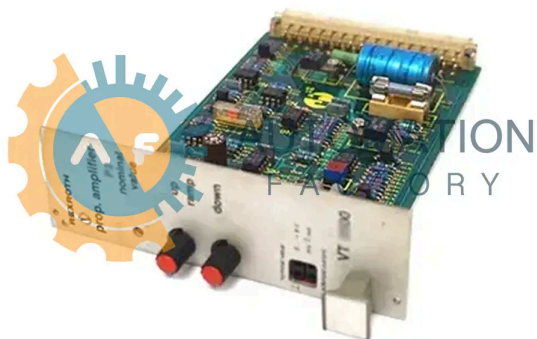

[Request a Quote](#)

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-2000-A52** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card dimensions:	100 x 160 mm (Euro-card, DIN 41 494)	Coil resistance (20 °C):	19.5 ?	Connection type:	32-pin male, DIN 41 612 form D
Current consumption:	<1 A	Front panel height:	128.4 mm (3 HE)	Front panel width, component side:	3 TE
Front panel width, soldering side:	1 TE (5.08 mm)	Fuse rating:	2.5 A T (slow-blow)	Input (command 1):	0 to +9 V (ref M0)
Input (command 2, diff.):	0 to +10 V, Rin 100 k?	Operating temp. range:	0 to 50 °C	Operating voltage:	24 VDC (+40%/? 5%), range 22-35 V
Output bias current:	10 to 300 mA, adjustable via pot R130	Output clock frequency:	100 or 200 Hz ±10% (jumper S2)	Power consumption:	<25 VA
Ramp time range:	30 ms to ~1 s or ~5 s (jumper S1)	Regulated voltage:	±9 V ±1%, ±25 mA loadable	Solenoid current:	800 mA +10%/? 5%
Last Verified:	07/03/2025 2:16 PM				

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods

