




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT-2000-S46/1

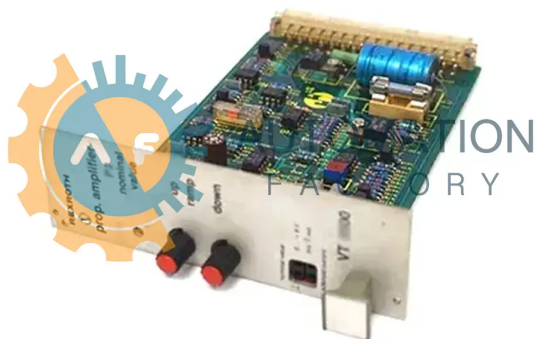

 **Request a Quote**

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-2000-S46/1** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Analog Input 1 Range:	0 ^{SFR} 9 V	Biasing Current Range:	10 ^{SFR} 300 mA adjustable	Card Dimensions:	100×160 mm (Euro-card DIN 41494)
Clock Frequency:	100/200 Hz (±10%) selectable	Connection Type:	32-pin male connector, DIN 41612 form D	Current Consumption:	<1 A
Differential Input Range:	0 ^{SFR} 10 V, Rin 100 k?	Fuse Rating:	2.5 A, slow-blow	Operating Voltage:	24 VDC (+40% ^{SFR} 5%), 22 ^{SFR} 35 V range
Output Current Measurement:	0 ^{SFR} 800 mA (1 mV/mA)	Panel Height:	3 HE (128.4 mm)	Panel Width:	3 TE (component), 1 TE (solder)
Permissible Operating Temperature:	0 ^{SFR} 50 °C	Power Consumption:	<25 VA	Ramp Time Adjustment:	30 ms to 1 s or 5 s selectable
Storage Temperature:	-25 ^{SFR} 85 °C	Weight:	0.1 kg	Last Verified:	07/02/2025 11:23 AM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.