




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT 2010 S 44

 In Stock, Shipping Varies

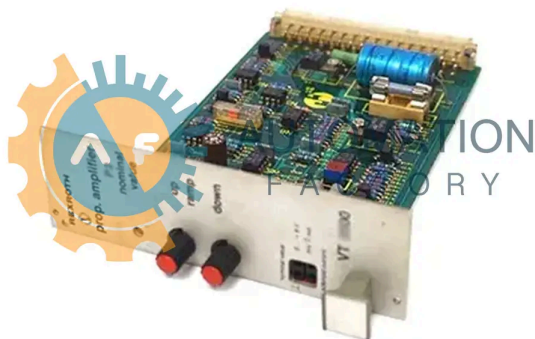

- ✓ Get a Quote in 5 minutes
- ✓ Parts ship in as little as 24 hours
- ✓ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 2010 S 44** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card Dimensions:	100 x 160 mm (Euro-card DIN 41 494)	Connector:	32-pin male (DIN 41 612, form D)	Current Consumption:	< 1 A
Front Panel Height:	3 HE (128.4 mm)	Front Panel Width (Component Side):	3 TE	Front Panel Width (Soldering Side):	1 TE (5.08 mm)
Fuse Rating:	2.5 A T (time?lag)	Input 1 Voltage Range:	0 to +9 V (ref. M0)	Input 2:	Differential 0 to +10 V; 100 k?
Operating Temperature:	0 to +50 °C	Operating Voltage:	24 VDC (+40%/? 5%), 22-35 V	Output Biasing Current:	10-300 mA (potentiometer R130)
Output Clock Frequency:	100 or 200 Hz (±10%, jumper? selectable)	Output Solenoid Current Rating:	800 mA (R20 = 19.5 ?)	Power Consumption:	< 25 VA
Ramp Time:	30 ms-1 s or 5 s (jumper S1)	Regulated Output Voltage:	±9 V (±1%, up to ±25 mA)	Storage Temperature:	?25 to +85 °C
Weight:	0.1 kg	Last Verified:	07/03/2025 10:54 PM		

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.