




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT 2013 -S-16

In Stock, Ships Fast

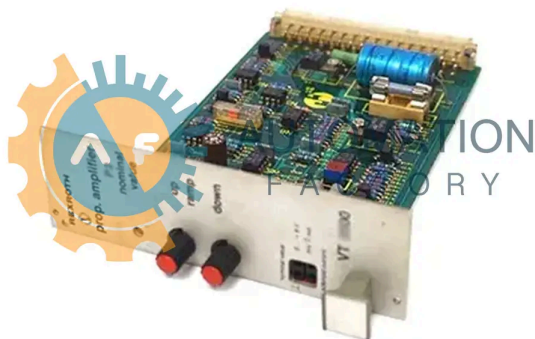

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 2013 -S-16** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card Dimensions:	100 x 160 mm (Euro-card, DIN 41 494)	Clock Frequency:	100 Hz or 200 Hz ±10% (S2 setting)	Component-side Width:	3 TE (15.24 mm)
Connector Type:	32-pin male, DIN 41 612 Form D	Current Consumption:	< 1 A	Front Panel Height:	3 HE (128.4 mm)
Fuse Rating:	2.5 A time-lag	Input 1:	Voltage range 0 to +9 V	Input 2:	Differential 0 to +10 V, 100 k?
Max Output Current:	800 mA ±10%	Operating Temperature Range:	0 to 50 °C	Operating Voltage:	24 VDC (22 ^{SFR} 35 V, +40%/5%)
Output Current Adjustment:	10 to 300 mA (via R130)	Output Voltage:	±9 V ±1%, max 25 mA external	Power Consumption:	< 25 VA
Ramp Time Adjustment:	30 ms ^{SFR} 1 s or 5 s (S1 setting)	Solder-side Width:	1 TE (5.08 mm)	Warranty:	1 year
Weight:	0.1 kg	Last Verified:	07/03/2025 8:19 PM		

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.