




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT 2228-1X

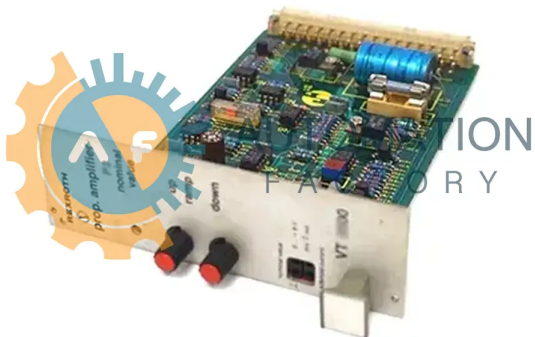

 **Request a Quote**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 2228-1X** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card Dimensions:	100 x 160 mm (Euro-card DIN 41494)	Clock Frequency:	100 Hz or 200 Hz $\pm 10\%$ (jumper S2)	Connector:	32-pin male DIN 41612 form D
Current Consumption:	<1 A	Fuse Rating:	2.5 A T (slow-blow)	Input Command 1:	0 ^{SPR} 9 V (ref M0)
Input Command 2 (differential):	0 ^{SPR} 10 V, Rin 100 k?	Operating Temperature:	0°C to 50°C	Operating Voltage:	22 ^{SPR} 35 VDC (+40%/5% @ 24 V)
Panel Height:	128.4 mm (3 HE)	Panel Width (component side):	3 TE	Panel Width (solder side):	1 TE (5.08 mm)
Power Consumption:	<25 VA	Ramp Time:	30 ms to 1 s or 5 s (jumper S1)	Regulated Voltage Output:	± 9 V $\pm 1\%$, load ± 25 mA
Solenoid Current Output:	0 ^{SPR} 800 mA (sense 0 ^{SPR} 800 mV @19.5 ?)	Storage Temperature:	-25°C to +85°C	Last Verified:	07/02/2025 6:11 AM

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.