




Bosch Rexroth Indramat - VT 2000 Proportional Amplifiers

VT2000S/K-30

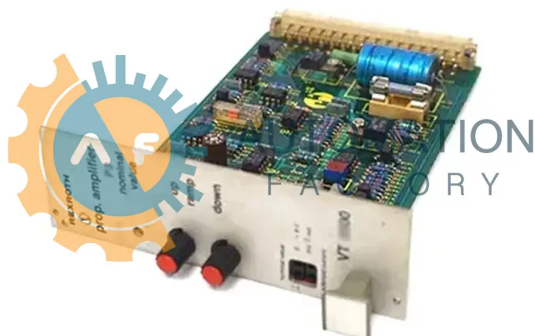

[Request a Quote](#)

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT2000S/K-30** is a part of the **VT 2000 Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Biasing current adjustment:	10 SPR 300 mA (potentiometer R130)	Card dimensions:	100 × 160 mm (Euro-card, DIN 41494)	Clock frequency:	100 or 200 Hz ±10% (jumper S2)
Command input voltage:	0 SPR 9 V (ref. M0)	Current consumption:	<1 A	Differential input voltage:	0 SPR 10 V, 100 k? input resistance
Front panel height:	3 HE (128.4 mm)	Front panel width:	4 TE (20.32 mm)	Fuse rating:	2.5 A T (slow-blow)
Operating voltage:	24 VDC (+40%/-5%); range 22 SPR 35 V	Output current range:	0 SPR 800 mA (1 mV/mA)	Permissible operating temperature:	0 SPR 50 °C
Power consumption:	<25 VA	Ramp time adjustment:	30 ms to 1 or 5 s (jumper S1)	Type of connection:	32-pin male connector, DIN 41612 form D
Warranty:	1 year	Weight:	0.1 kg	Last Verified:	07/01/2025 7:20 PM

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods

