


Bosch Rexroth Indramat - VT-5000 IO Cards

VT 5014-37/R1E

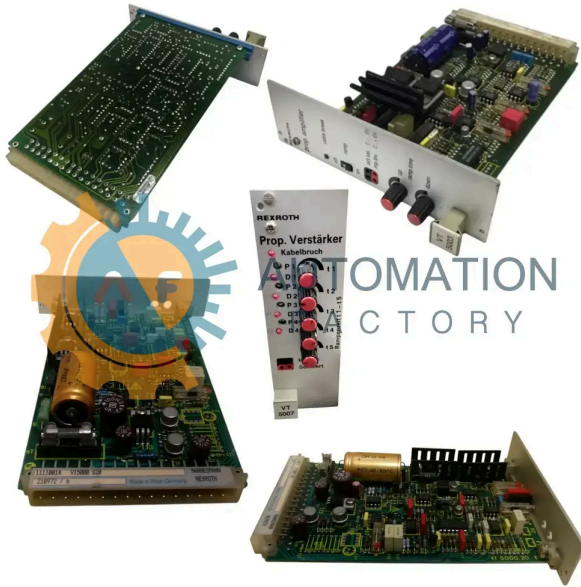

 **In-Stock, Ships 1-2 Days**

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 5014-37/R1E** is a part of the **VT-5000 IO Cards Series** by **Bosch Rexroth Indramat**.

Specifications

Actual Pressure Input Range:	0 ^{SPR} 5 V, 0 ^{SPR} 10 V, 0.5 ^{SPR} 5 V, 1 ^{SPR} 10 V, 0 ^{SPR} 20 mA, 4 ^{SPR} 20 mA	Actual Pressure Input Resistance:	100 ?	Actual Pressure Output:	0 ^{SPR} 10 V
Actual Swivel Angle Output:	-10 ^{SPR} 10 V	Auxiliary Voltage for External Use:	±15 V ±2%/-6%, max load 10 mA 24 V DC +40%/-10% (21.6 ^{SPR} 33.6 V)	Current Consumption:	0.6 A nominal, 1.25 A max
Lower Limit Voltage:	21 V	Operating Voltage: Output Stage Max Current:	2.5 A	Oscillator Amplitudes: Output Stage Resistance:	IW9 1 V, DM2 3.6 V 2 ?
Oscillator Frequency:	5.4 kHz	Pressure Input Impedance:	>50 k?	Swivel Angle Command Range (regen):	0 ^{SPR} 10 V
Pressure Command Input Range: Swivel Angle Command Range (std):	0 ^{SPR} 10 V ±10 V	Swivel Input Impedance:	>50 k?	Upper Limit Voltage:	35 V
Last Verified:	05/12/2026 3:44 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@wakeindustrial.com

Shipping Options



Payment Methods

