




Bosch Rexroth Indramat - VT-MSPA Drives

VT-MUXA2-1-10/V0/1A

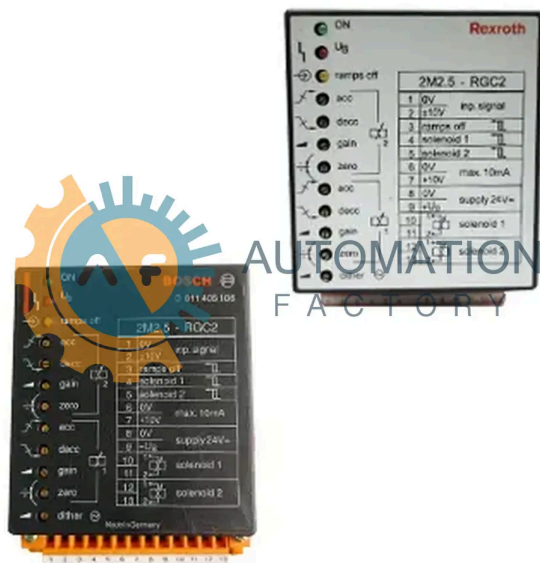

 **Request a Quote**

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-MUXA2-1-10/V0/1A** is a part of the **VT-MSPA Drives Series** by **Bosch Rexroth Indramat**.

Specifications

Analog input command (1 solenoid): 0 ^{SPR}100% via 4 ^{SPR}20 mA or 0 ^{SPR}10 V
Command value attenuator: 70 ^{SPR}110%
Free-fall endurance: 1 m (original packaging)
Maximum residual ripple: 2.5 Vpp @ 40 ^{SPR}400 Hz
Protection class: IP20
Zero point calibration: ±10%

Analog input command (2 solenoids): 0 ^{SPR}±100% via 4 ^{SPR}20 mA or 0 ^{SPR}±10 V
Current input load resistance: 100 ?
Max cable length (1.5 mm²): 50 m
Operating voltage range: 18 ^{SPR}36 V (nominal 24 V ±40%/±20%)
Ramp time: 0.01 ^{SPR}30 s
Last Verified: 07/02/2025 1:25 AM

Clock frequency range: 95 ^{SPR}505 Hz
Differential input resistance: 200 k?
Max solenoid current: 2.7 A
Output stages: Short-circuit-proof
Step level: 0 ^{SPR}50%

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

