




Bosch Rexroth Indramat - VT-VSPA Proportional Amplifiers

VT-MRPA2-2-11/V0/0

 **In Stock, Ships 2-3 Days**

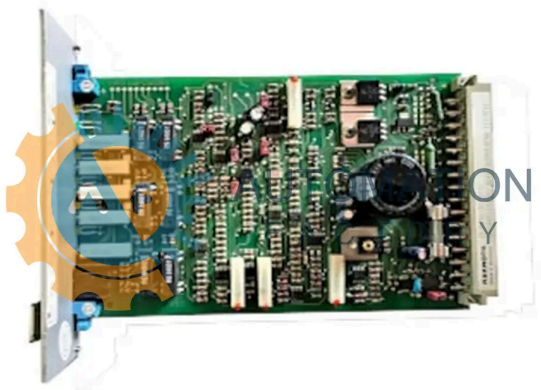

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-MRPA2-2-11/V0/0** is a part of the **VT-VSPA Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Command Signal Input (Current):	4-20mA	Command Signal Input (Voltage):	±10V	Digital I/O:	Enable status feedback signals.
Enclosure Type:	IP20	Input Voltage:	400-480 VAC	Maximum Current Limitation:	1.5A
Mounting Design:	Modular, DIN-rail mountable	Number Of Phases:	Three-phase	Operating Temp Range:	-20°C to +50°C
Power Output:	5 kW	Solenoid Configuration:	Single or dual solenoid support	Solenoid Drive Output:	PWM with adjustable frequency
Test Points:	Built-in test jacks for monitoring	Last Verified:	07/04/2025 4:56 PM		

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.