




Bosch Rexroth Indramat - VT-VSPA Proportional Amplifiers

VT-VSPA 1-525-10/V0/RPT

 **In Stock, Ships Fast**

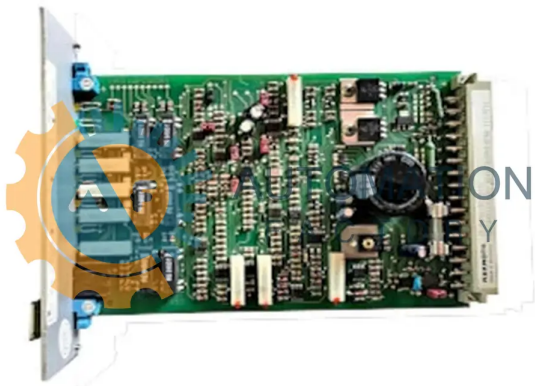

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-VSPA 1-525-10/V0/RPT** is a part of the **VT-VSPA Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card Dimensions:	Eurocard (100 x 160 mm)	Clock Frequency For Valve Type Wra6.2x:	300 to 370 Hz	Connector Type:	48-pin male (DIN 41612, design F)
Current Consumption:	I < 2 A	Inputs - Analog (command Value 5 Differential Input):	0 to ±10 V, Re > 50 k?	Inputs - Analog (command Value 6 Current Input):	4-20 mA, load Re = 100 ?
Inputs - Analog (command Values 1 To 4):	0 to ±10 V, Re > 100 k?	Operating Temperature:	0 to 50 °C	Operating Voltage:	UB 24 VDC +40%/-20%
Outputs - Command Value Signal:	±10 V, ±2 %	Power Consumption:	Ps < 50 VA	Ramp Time Range:	20 ms to 5 s; switchable to 0.2 to 50 s
Reverse Polarity Protection:	Available	Storage Temperature:	-25 to +85 °C	Weight:	0.17 kg (net)
Last Verified:	08/29/2025 9:16 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.