


Bosch Rexroth Indramat - VT-VSPA Proportional Amplifiers

VT-VSPA1-1-10/V0/0

 [Request a Quote](#)

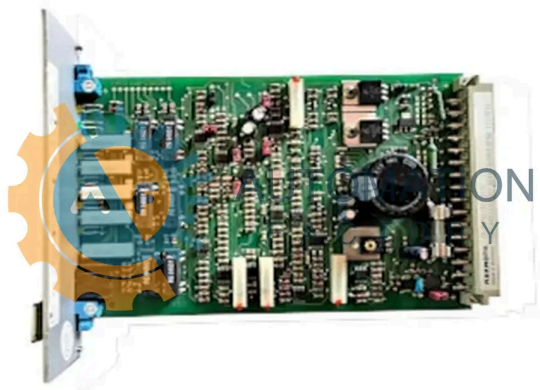

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-VSPA1-1-10/V0/0** is a part of the **VT-VSPA Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Analog Input (cmd 1-4):	0 ... ±10 V; Re >100 k?	Analog Input (cmd 5, differential):	0 ... ±10 V; Re >50 k?	Command Adjustment Range:	0 ... 110%
Current Consumption:	<2 A	Current Input (cmd 6):	4 ... 20 mA; load 100 ?	External Ramp Time Input:	0 ... 10 V; Re = 10 k?
Internal Cmd Value Output:	±10 V ±2%; I _{max} 2 mA	Nominal Supply Voltage:	24 VDC (+40%/-20%)	Output Stage Current:	0 ... 2.5 A; short-circuit-proof
Power Consumption:	<50 VA	Ramp Time Range:	20 ms ... 5 s or 0.2 ... 50 s	Supply Voltage Range:	18 ... 35 VDC
Zero Adjustment Range:	±30%	Last Verified:	07/01/2025 12:50 PM		

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.