




Bosch Rexroth Indramat - VT-VSPA Proportional Amplifiers

VT-VSPD-1-22/V0/0-0-1

 **In Stock, Shipping Varies**

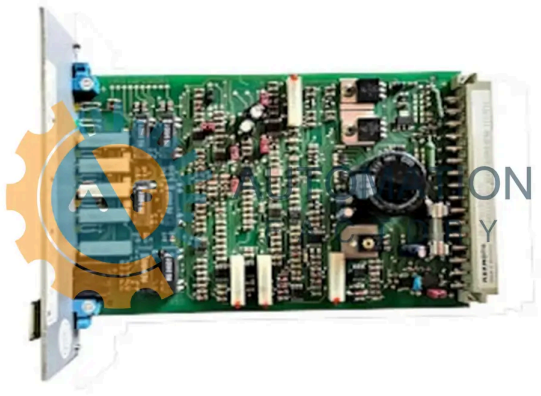

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT-VSPD-1-22/V0/0-0-1** is a part of the **VT-VSPA Proportional Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Admissible Operating Temperature Range: 0 to 50 °C

Command Values (current Input): 4-20 mA, load RB = 100 ?

Current Consumption: < 2 A

Operating Voltage: 24 VDC + 40 %
- 20 %

Weight: 0.17 kg (net)

Clock Frequency: 3drep6.2x: 170 Hz

Command Values (differential Input): 0 ± 10 V, Re > 50 k?

Operating Range: Lower Limit Value: 18 V

Power Consumption: < 50 VA

Last Verified: 08/31/2025
12:36 PM

Clock Frequency: Wra6.2x: 300 - 370 Hz (at UB = 24 V and Ucommand = 0 V)
Command Values (potentiometer Inputs): 0 ± 10 V, Re > 100 k? (Reference M0)

Operating Range: Upper Limit Value: 35 V

Ramp Times: 20 ms to 5 s, switchable to 0.2 to 50 s

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

