


Bosch Rexroth Indramat - VT 1600 Servo Amplifiers

VT 16000-22/130

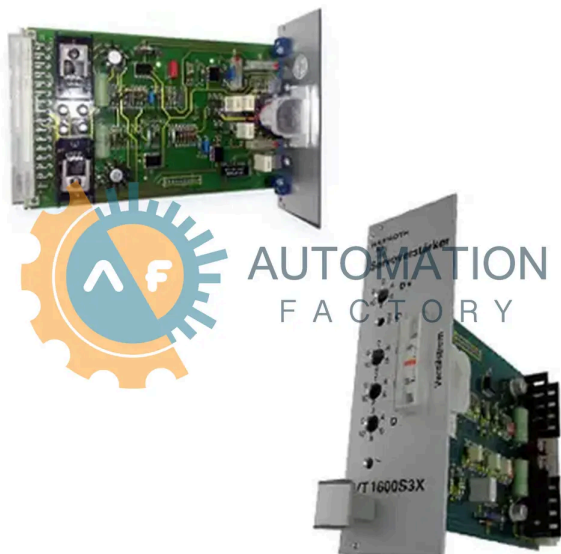

 [Request a Quote](#)

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **VT 16000-22/130** is a part of the **VT 1600 Servo Amplifiers Series** by **Bosch Rexroth Indramat**.

Specifications

Card Dimensions:	100 x 160 mm (Euro card, DIN 41494)	Dither Current (typical):	3 mApp amplitude at 340 Hz	Front Plate Height:	128 mm (3U, 5.05 in)
Front Plate Solder Side Width:	5.08 mm (0.20 in)	Front Plate Total Width:	8 HP (~40 mm)	Internal Control Voltage:	±10 V
Output Current:	±60 mA or ±100 mA	Power Supply Current:	<200 mA	Power Supply Voltage:	±15 V (regulated) or ±22 ^{SFR} 28 V
Relay Coil Resistance:	2 k?	Relay Coil Voltage:	22 ^{SFR} 28 V	Storage Temperature:	-20 to 70 °C
Unit Depth Bottom:	15 mm (0.59 in)	Unit Depth Middle:	128.4 mm (5.05 in)	Unit Depth Top:	40.3 mm (1.59 in)
Unit Height:	89 mm or 100 mm	Unit Length:	172 mm (6.67 in)	Unit Width:	186 mm (7.32 in)
Weight:	0.15 kg (0.33 lbs)	Last Verified:	07/01/2025 9:42 AM		

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.