




Okuma - BL Servo Drives

BLII-50A

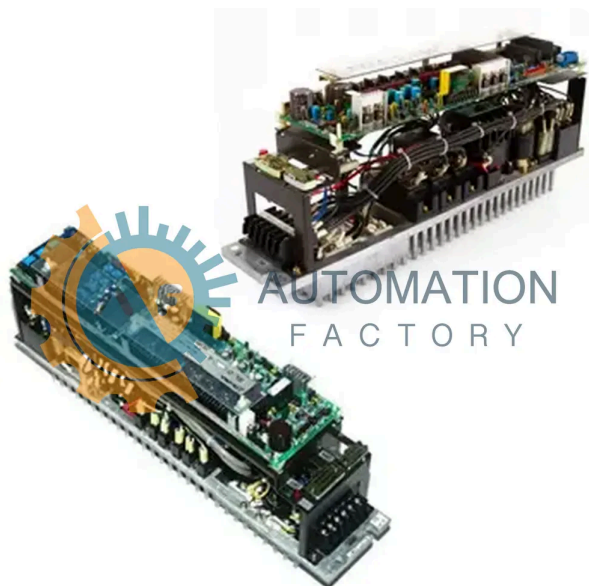

[Request a Quote](#)

- ☒ Get a Quote in 5 minutes
- ☒ Parts ship in as little as 24 hours
- ☒ Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **BLII-50A** is a part of the **BL Servo Drives Series** by **Okuma**.

Specifications

Auxiliary Power Input Terminals:	AC1, AC2 ? Accept 100 V AC	Brake Terminals:	MB11, MB21	Current Consumption:	10 A
Ingress Protection:	IP20	Main Terminals (Power):	R, S, T	Motor Brake Power Terminals:	MBP, MBN
Motor Output Terminals:	U1, V1, W1 ? Connected to motor U, V, W phases	Motor Overload Detection:	TPP, TPN via XB-4 terminal block	Operating Frequency:	50-60 Hz
Power Input (Main):	Three-phase 180-240 V AC	Power Rating:	1.5 kW	Rated Voltage:	220-240 VAC
Regenerative Discharge Terminals:	VH, RD, TRC, VL	Last Verified:	05/31/2025 9:52 PM		

Contact Us

1620 Old Apex Road, Cary, NC 27513, USA

Toll Free: [1-888-551-3082](tel:1-888-551-3082)

International: [1-919-443-0207](tel:1-919-443-0207)

Fax: [1-919-867-6204](tel:1-919-867-6204)

Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.