


Okuma - BL Servo Drives

I9-90-1-26

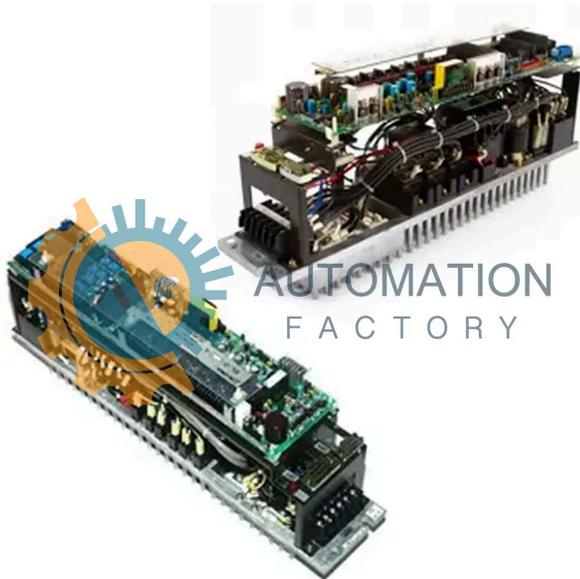

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **I9-90-1-26** is a part of the **BL Servo Drives Series** by **Okuma**.

Specifications

3-phase input voltage:	180-240 V, 50/60 Hz	Connector types:	MRP-20F01; Dynamic series 178288-5	Control circuit input voltage:	90-121 V (rms)
Main circuit input voltage:	180-220 V (rms), 49-62 Hz	Monitoring function:	Speed & torque via VEL, TO check terminals	Protection features:	Overcurrent, overvoltage, undervoltage & overheat detection
Required power estimation:	Rated motor output × 0.32	Status indication:	LED indicators: PON, OP, OCM, PCS, OV, UV, ROH, BOH, LOSS	Unit capacity range:	15-150 (model dependent)
Last Verified:	06/01/2025 2:15 AM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods

