


B & R Automation - X20 Fieldbus Input Output Series

X20DO6321

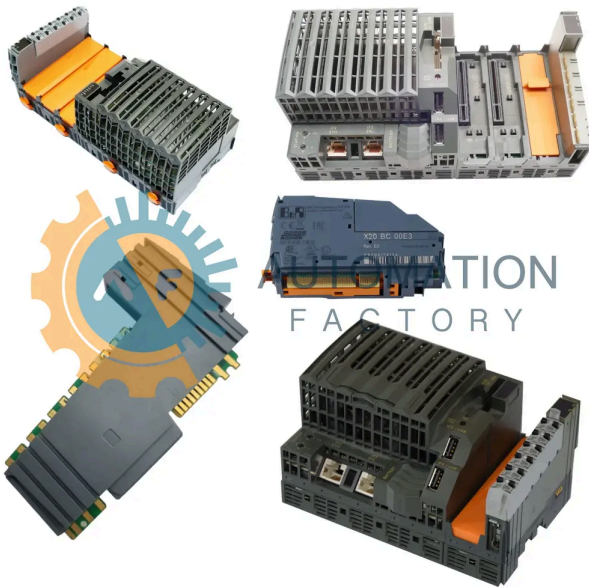

 [Request a Quote](#)

- Get a Quote in 5 minutes
- Parts ship in as little as 24 hours
- Up to half the cost of the manufacturer



Secure Online
Checkout



Free Ground
Shipping



One Year
Warranty

The **X20DO6321** is a part of the **X20 Fieldbus Input Output Series** by **B & R Automation**.

Specifications

Number Of Digital Outputs:	6	Connection Type:	Sink	Wiring Type:	1- or 2-wire connections
Nominal Voltage:	24 VDC	Output Current:	0.5 A per channel	Total Output Current:	3 A
Switching Voltage Range:	24 VDC -15% / +20%	Output Protection:	Thermal cutoff, Integrated inverse diode	Leakage Current:	75 uA
Switching Delay (0 degrees Ct' 1):	<300 us	Switching Delay (1 degrees Ct' 0):	<300 us	Switching Frequency (resistive Load):	Max. 500 Hz
Isolation Voltage (channel To Bus):	500 V	Operating Temperature (horizontal):	-25 to 60 degrees C	Operating Temperature (vertical):	-25 to 50 degrees C
Last Verified:	12/29/2024 6:25 PM				

Contact Us

 1620 Old Apex Road, Cary, NC 27513, USA

 Toll Free: [1-888-551-3082](tel:1-888-551-3082)

 International: [1-919-443-0207](tel:1-919-443-0207)

 Fax: [1-919-867-6204](tel:1-919-867-6204)

 Email: sales@automation-factory.com

Shipping Options



Payment Methods



Automation Factory sells factory new and pre-owned surplus products and maintains channels to procure supply. Automation Factory is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed. Designated trademarks, brand names, and brands appearing herein are the property of their respective owners.